



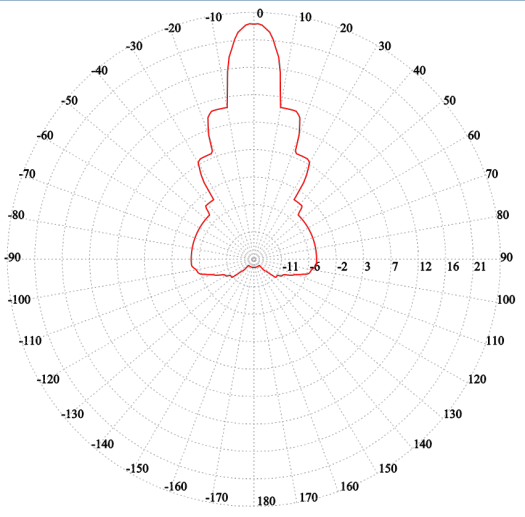

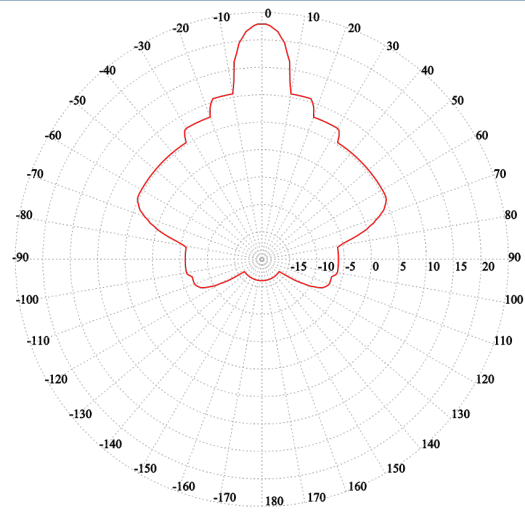

## ODU/F58F/INT

## Point-to-Point Radio

Integrated Antenna	
Gain	23 dBi
VSWR	1.5 :1 (typ)
3 dB Azimuth Beamwidth	10 Deg. (typ)
Polarization	Dual Linear (Vertical and Horizontal)
Sidelobes Level	ESTI EN 302 326-3 V1.1.2 DN3
Cross Polarization	ESTI EN 302 326-3 V1.1.2 DN3
F/B Ratio	-30 dB
Port To Port Isolation	30 dB (max)
Lightning Protection	DC Grounded
Antenna Pattern	
Elevation @ 5.8GHz	Azimuth @ 5.8GHz
	

## Ordering

## Airmux-400H/ODU/F58F/INT

Airmux-400H ODU, with an integrated antenna, supporting multi frequency bands at 5.x GHz, factory default 5.8 GHz FCC/IC.

## International Headquarters

24 Raoul Wallenberg Street

Tel Aviv 69719, Israel

Tel. 972-3-6458181

Fax 972-3-6498250, 6474436

E-mail [market@rad.com](mailto:market@rad.com)

[www.rad.com](http://www.rad.com)

## North America Headquarters

900 Corporate Drive

Mahwah, NJ 07430, USA

Tel. 201-5291100

Toll free 1-800-4447234

Fax 201-5295777

Order from: **Cutter Networks**

Phone: 727-398-5252



[www.bestdatasource.com](http://www.bestdatasource.com)

Your Network's Edge