

ASMi-31

Sync/Async 2-Wire Manageable IDSL Modem

2-wire full-duplex IDSL
modem with remote
management extends
data transmission to
7.0 km (4.3 miles)



- 2-wire IDSL modem with remote management
- Data range of up to 7.0 km (4.3 mi)
- Multiple data rates between 1.2 and 128 kbps
- 2B1Q line coding for extended range and improved quality
- Full-duplex inband management of the remote unit over the D-channel

ASMi-31 is a 2-wire full-duplex IDSL modem with remote management that extends data transmission to 7.0 km (4.3 miles) irrespective of data rate.

ASMi-31 operates synchronously or asynchronously at user-selectable data rates from 1.2 to 128 kbps.

The modem uses 2B1Q line code and adaptive equalizers to provide immunity from background noise, eliminate normal line distortion, and enable efficient transmission over 2-wire twisted pair cables.

ASMi-31 is available as a "master" or "slave" standalone unit. The master modem includes a front panel LCD and control buttons. The slave modem has a blank front panel with a special 20-pin connector for a portable control unit (PCU) connection.



data communications
Innovative Access Solutions

ASMi-31

Sync/Async 2-Wire Manageable IDSL Modem

The master modem provides full-duplex inband management of the remote unit. Management data is transmitted over the D-channel to ensure simultaneous configuration of the local and remote units, activation of real-time alerts on system faults, and initiation of diagnostic tests.

ASMi-31 supports a wide range of digital interfaces: V.24/RS-232, V.35, X.21, RS-530, V.36/RS-449 and G.703 Codirectional (64 kbps). In addition, the modem supports a built-in Ethernet bridge (IR-ETH) and IP router (IR-IP) to allow LAN-to-LAN connectivity using IDSL technology.

ASMi-31 can be managed via the front panel buttons and LCD (in the master unit).

The ASMi-31 clock source depends on the modem's functional mode (master or slave):

- Master clock: INT derived from internal oscillator or EXT derived from the DTE interface
- Slave clock: RCV (recovered from line signal).

The user-selectable carrier may be continuous or controlled by RTS for passing control signals end-to-end.

ASMi-31 has wide diagnostic capabilities that include the following test options:

- V.54 local analog and remote digital loopbacks
- BER testing per V.52.

Line interface circuitry protects against lightning and power surges.

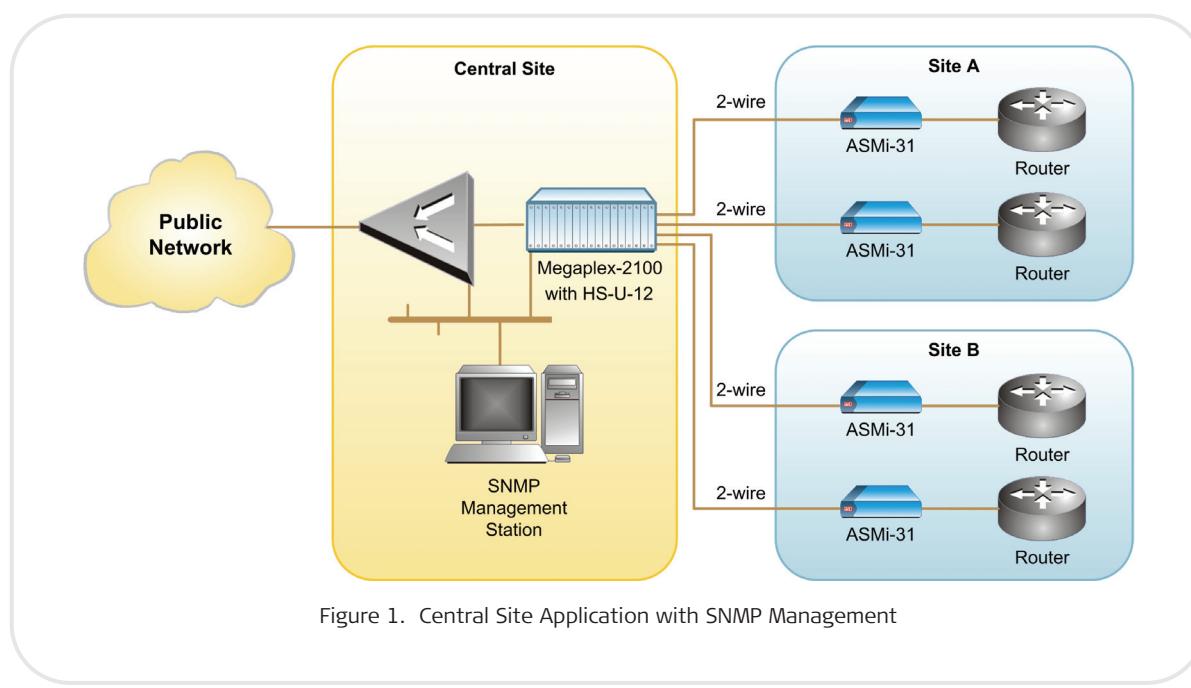


Figure 1. Central Site Application with SNMP Management

Specifications

LINE INTERFACE

Line Type

Unconditioned telephone line (twisted pair), 19 AWG to 26 AWG

Line Coding

2B1Q

Range

Up to 7.0 km (4.3 miles) over 24 AWG line, irrespective of data rate

Level

Up to 14 dBm

Impedance

135W, high

Return Loss

Greater than 15 dB

Compliance

ANSI T1.601, 1988

Carrier

Constantly ON or controlled by RTS

Connector

3-clip terminal block or RJ-45

DTE INTERFACE

Connectors

V.24/RS-232: 25-pin D-type, female

RS-530: 25-pin D-type, female

V.35: 34-pin, female

X.21: 15-pin, D-type, female
 V.36/RS-449: via adapter cable converting between the RS-530 connector and a 37-pin, D-type, female connector
 IR-ETH (Ethernet bridge): RJ-45 or BNC coax
 IR-IP (IP router): RJ-45
 G.703 Codirectional: RJ-45 or terminal block

Note: For G.703 codirectional interfaces, there is no end-to-end byte synchronization.

Data Rate

Synchronous: 1.2, 2.4, 4.8, 9.6, 16, 19.2, 32, 38.4, 48, 64, or 128 kbps

Asynchronous: 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6, or 115.2 kbps

Control Signals

DCD
 On: the two modems are synchronized
 Local unit DCD follows remote unit RTS

DSR
 Always On
 Remote unit DSR follows local unit DTR

GENERAL

Timing

Master clock

Internal: supplied by the internal oscillator

External: received from the DTE

Slave clock

Receive: recovered from the line signal

Diagnostics

V.54 local analog and remote digital loopbacks

V.52 BER testing

Note: The loopbacks are initiated by the management software or via the DTE interface pins. Activation via the DTE interface pins is not available for X.21, G.703 or Ethernet interfaces.

Indicators

RTS (yellow)

On: DTE activates request to send

DCD (yellow)

On: a valid receive signal is present

TD (yellow)

On: a steady space is transmitted
 Flashing: data is transmitted

RD (yellow)

On: a steady space is received
 Flashing: data is received

ALM (red)

On: a new alarm is detected in the alarm buffer

TST (red)

On during loopback or BER testing

SYNC (green/red)

Red: the local modem's data link is not synchronized with the remote modem

Green: the local modem's data link is synchronized with the remote modem

Table 2. Sync Modem Comparison Chart

Feature	SRM-5SC SRM-6SC	ASM-10/8	ASM-20	ASM-31 ASMi-31	ASM-40	ASMi-52	ASM-60	ASM-61
Max. data rate (kbps)	19.2	19.2	256	128	2048	2.3/4.6 Mbps	10 Mbps	10 Mbps
Interface	V.24	V.24	V.24, V.35, V.36, X.21, RS-530, Ethernet, UTP, UTP/Q, IP, G.703 Codirectional			V.35, RS-530, X.21, E1/T1, Ethernet	Router, Ethernet, HSSI	Ethernet
2W/4W	4	2/4	4	2	4	2/4	4	2
Approx range (km @ 24 AWG)	5.0	13.0	7.5	8.0	1.8	4	2.0	1.2
Rack option		✓	✓	✓	✓	✓		
Multipoint configuration	✓	✓	✓					

ASMi-31

Sync/Async 2-Wire Manageable IDSL Modem

Buttons

CURSOR – Moves among the information fields on the LCD

ENTER – Confirms the changes made during ASMi-31 operation

SCROLL – Scrolls among the field options displayed on the LCD

Physical

Height: 4.4 cm (1.7 in)

Width: 1.5 cm (8.5 in)

Depth: 4.3 cm (9.6 in)

Weight: 1.5 kg (3.2 lb)

Power Supply

Wide range:

100 to 240 VAC,
-40 to -72 VDC

24 VDC

Power Consumption

5W max.

Line Protection

AC/DC overvoltage protection circuits are connected via transformers to the transmit and receive lines

Environment

Temperature: 0°–50°C(32°–122°F)

Humidity: Up to 90%, non-condensing

Ordering

ASMi-31-2/M/*/#

Sync/async 2-wire manageable IDSL modem, master unit

ASMi-31-2/S/*/#

Sync/async 2-wire manageable IDSL modem, slave unit

Legend

* Power supply type:

115	115 VAC
230	230 VAC
48	-48 VDC
24	24 VDC

DTE interface:

V24	V.24/RS-232 interface
V35	V.35 interface
V36	V.36/RS-449 interface
530	RS-530 interface
X21	X.21 interface
G703TB	G.703 Codirectional (64 kbps) interface with terminal block connector
G703RJ	G.703 Codirectional (64 kbps) interface with RJ-45 connector
UTP	IR-ETH module with RJ-45 connector
IP	IR-IP module

SUPPLIED ACCESSORIES

AC power cord (when AC power supply is ordered)

DC adapter (when DC power supply is ordered)

OPTIONAL ACCESSORIES**PCU**

Portable control unit with protective casing for the slave ASMi-31 unit

RM-28

Hardware kit for mounting one or two units in a 19-inch rack

International Headquarters
 24 Raoul Wallenberg Street
 Tel Aviv 69719, Israel
 Tel. 972-3-6458181
 Fax 972-3-6498250, 6474436
 E-mail market@rad.com

North America Headquarters
 900 Corporate Drive
 Mahwah, NJ 07430, USA
 Tel. 201-5291100
 Toll free 1-800-4447234
 Fax 201-5295777
 E-mail market@radusa.com

www.rad.com